







Qualified to UL Category Code YYXS-YYXS7 Hood and Duct Accessories

UL File #MH27669 New York City, Department of Buildings MEA 288-01-E and 88-99-E

Air Boss® KES Series

Kitchen Exhaust contains grease, smoke and odors which can be filtered properly to help meet EPA, state and local air quality standards. With the TRION KES system, you'll be on good terms with both city inspectors and your commercial and residential neighbors.

The KES is a multi-stage, self-contained filtration unit that ensures maximum effectiveness through the use of:

- An Electrostatic Precipitator
- · A 95% DOP Media Filter
- · Carbon Modules For Odor Control

Features & Benefits


- · High-Efficiency at Low, Constant Pressure Drop
- Compliance with EPA, State, and Local Air Quality Laws and Regulations
- Cleaner, Fresher Kitchen Exhaust that Fosters "Goodwill" with Commercial and Residential Neighbors along with Federal, State, and Local Government Agencies
- Optional Ansul® Fire Suppression Components to meet NFPA 96 Requirements

Applications

- Restaurants
- Delis
- Hospitals
- Schools
- · Sport & Entertainment Complexes

How It Works


As air enters the electrostatic filter, the particles pass through a high intensity electrical field that imparts an electrical charge to the particles, which range in size from 0.01 micron to 10 microns. The charged particles pass through a series of alternately charged collector plates. Particles are repelled by plates with the same polarity and attracted to plates with opposite polarity, similar to how a powerful magnet works.

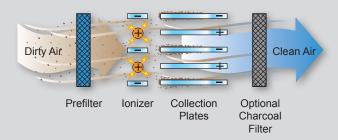



General Information

Top/Plan View

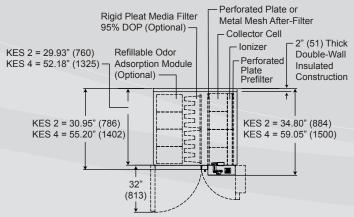


Electrostatic Efficiency/Capacity Data

DOP CFM Capacities	95%	94%	93%	92%
KES 2	1200	1400	1750	2000
KES 4	2400	2800	3500	4000
Face Velocity (fpm)	372	434	542	620


Pressure Drop Data (Inches H,O)

KES 2 CFM	1,200	1,400	1,750	2,000
KES 4 CFM	2,400	2,800	3,500	4,000
ESP*	0.09	0.14	0.20	0.27
Media**	0.15	0.21	0.33	0.43
Carbon	0.08	0.10	0.15	0.21
TOTAL**	0.32	0.45	0.68	0.91

Side Elevation View

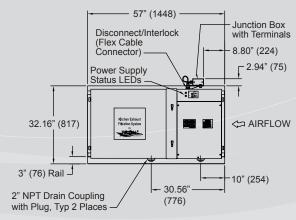


Inlet View

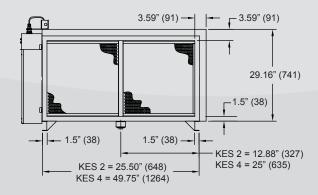

- * Includes perforated plate pre- and post filters.
- ** With clean media filters, allow up to 1.3" additional pressure drop for filter loading.

Specifications

Model	KES 2	KES 4	
	1100 -	1.20	
Input Voltage	120/220 VAC, 50/60 Hz	120/220 VAC, 50/60 Hz	
Current	1.5 Amp Max.	1.5 Amp Max.	
Output Voltage	12.5 - 13.0 KVDC Ionizer; 6.0 - 6.5 KVDC Collector	12.5 - 13.0 KVDC Ionizer; 6.0 - 6.5 KVDC Collector	
Power Supply	(1) PMW with Status LED	(2) PMW with Status LED	
Power Supply Status Light	LED, 5 Amp Max.	(2) LED, 5 Amp Max.	
Standard Unit Weight	480 lbs (218 kg) Includes Ionizer and Pre/After Filters	650 lbs (296 kg) Includes Ionizer and Pre/After Filters	
Pre-Filter	Perforated Plate, 2 lbs (0.9 kg) Total	Perforated Plate, 4 lbs (1.8 kg) Total	
After-Filter	Perforated Plate or Metal Mesh, 2 lbs (0.9 kg)	Perforated Plate or Metal Mesh, 4 lbs (1.8 kg)	
lonizer	5 lbs (2.3 kg)	10 lbs (4.6 kg)	
Collector Cells	Two Each - 60 lbs (27.3 kg) Total	Four Each - 120 lbs (54.6 kg) Total	
Rigid Pleat Media	95% DOP (Optional), 17 lbs (7.7 kg)	(2) 95% DOP (Optional), 34 lbs (15.5 kg)	
Optional Refillable Odor Absorption Module	120 lbs (54.6 kg) Total	240 lbs (109 kg) Total	
Optional Fire Suppression (Ansul R102)	1W & 1N Nozzles (2 Each)	1W & 1N Nozzles (2 Each)	

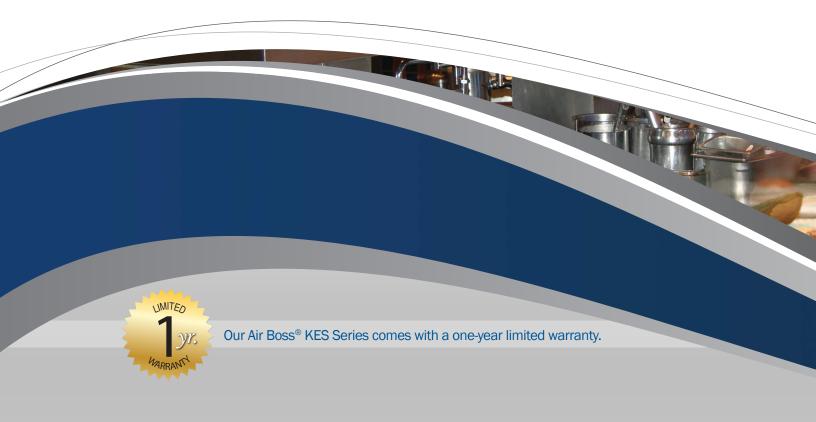



Learn more about other TRION commercial products by contacting your local TRION representative or by visiting us on the web at www.trioniaq.com.



Mini M.E. Mist Collector



Indoor Air Quality Since 1947

ISO 9001:2015 Certified

Industry Membership:



Proudly Designed, Engineered, and Manufactured in the USA.*



*Manufactured with domestic and foreign components.

To help serve you better, please contact us at:

800-884-0002 (tel)

800-458-2379 (fax)

TRION®
101 McNeill Road
Sanford, NC 27330
www.trioniaq.com
customerservice@trioniaq.com

TRION® is a registered trademark of Air System Components, Inc. Air System Components, Inc. is a subsidiary of Johnson Controls Inc. All product specifications reflect available information at the printing of this brochure. TRION® reserves the right to revise or modify products and/or specifications without notice. © 2018 TRION®